

SPACING - 1" on center.

VOLTAGE - 120V.

WATTAGE - 0.80 watts/ft.1.

TUBE DIAMETER - 0.5" diameter for PVC cable.

REEL LENGTH - 150 ft./reel

LIFE HOURS - 100,000 hours of life.

COLORS - Cool White, Warm White, Blue, Green, Red, and Yellow

DIMMING - Dimmable with most electronic low voltage and LED/ CFL Dimmers. Minimum loads may apply.

ACCESSORIES - Power Cords, Splice Connectors & End Cap available. Mounting channels (see specs below) and clips available.

LISTING - U.L. Listed for wet location.UL void if BPS-281 is cut.

TEMPERATURE RATING - 4 - 96 °C.

VOLTAGE & CUT LENGTHS - 120V - 36" for Cool White, Warm White, Blue and Green. 54" for Red and Yellow.




MOUNTING TRACK SPECIFICATION

This Mounting Channel is a PVC channel.

MATERIAL - PolyVinyl Chloride (PVC)

LENGTH - Mounting PVC channel available in 4 ft. lengths.

MOUNTING - Channel can be mounted using screws, double-coated tape, or adhesive.

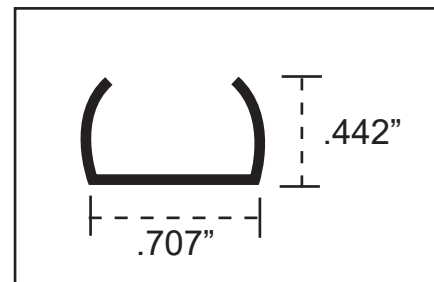

ORDERING INFORMATION

CATALOG #	DESCRIPTION	WATTS / FT	VOLTS	CUT LENGTH	LENGTH
BPS-281-120V-CW	Cool White	.8	120	36in	150ft / Reel
BPS-281-120V-WW	Warm White	.8	120	36in	150ft / Reel
BPS-281-120V-BL	Blue	.8	120	36in	150ft / Reel
BPS-281-120V-GR	Green	.8	120	36in	150ft / Reel
BPS-281-120V-RD	Red	.8	120	54in	150ft / Reel
BPS-281-120V-YL	Yellow	.8	120	54in	150ft / Reel

REV. 05/13/26