

INPUT VOLTAGE – 120VAC

OUTPUT VOLTAGE – Available in 12VDC and 24VDC models

WATTAGE OPTIONS – 12V / 40W & 60W, 24V / 60W & 96W

DIMMING – Smooth dimming from 100%–1% with load-sensing auto-trim optimization

APPLICATIONS – Single-pole or 3-way applications with a mechanical switch


ENVIRONMENT – Indoor / Damp Location

CONNECTION TYPE – Hardwired

COMPATIBILITY – Compatible with industry-standard colors and trim plates

LISTINGS –  Listed (2108), Class 2 Power Supply.  Compliant

WARRANTY – 5-Year Limited Warranty

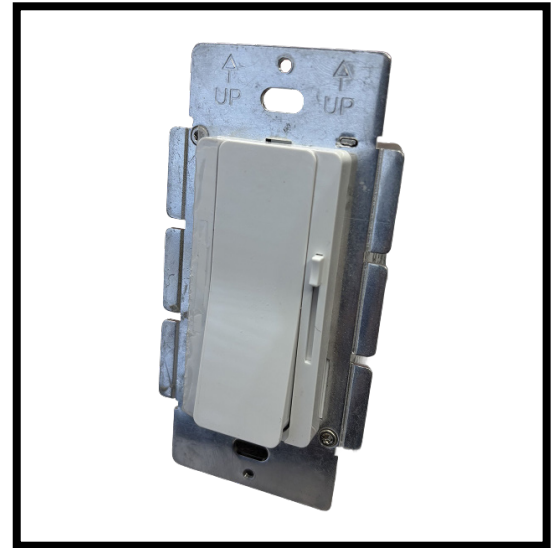

ORDERING INFORMATION

CATALOG #	INPUT VOLTAGE	OUTPUT VOLTAGE	LOAD
DSH-SLD-1240	120V	12V	40 WATTS
DSH-SLD-1260	120V	12V	60 WATTS
DSH-SLD-2460	120V	24V	60 WATTS
DSH-SLD-2496	120V	24V	96 WATTS