


LAMPHOLDER	Black phenolic, medium base UL weatherproof with hook for optional mounting.
POWER CORD	12/2 G. Black flexible duplex cable, UV rated for extended outdoor use.
SUPPORT CABLE	3/32" SS aircraft catenary cable supports the system, 980# test. Heavier cable available.
TERMINATION KITS	Heavy duty stainless steel hardware available.
LAMPS	Wet location rated LED medium base.
DIMMING	Dimmable to 10% with ELV trailing edge type dimmers.
VOLTAGE	120V system (1920 watts max load). No driver or transformer required.
CERTIFICATION	ETL listed for permanent damp or wet installations.  2001431  MADE IN THE USA



G16 - 27K / 3.5W / 325L / CLEAR
WHITE OR FROSTED AVAILABLE

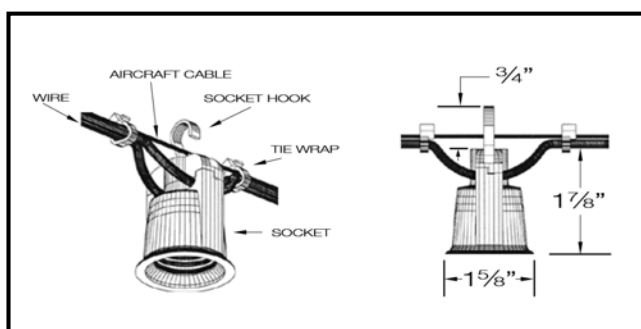

TERMINATION KIT (2 PER KIT)

ORDERING INFORMATION EXAMPLE

PRODUCT	SPACING	VOLTS	LAMP	TERMINATION KIT
BPS-1560D	12" / 18" / 24" / 36"	120	G16	TK
BPS-1560W	12" / 18" / 24" / 36"	120	G16	TK